


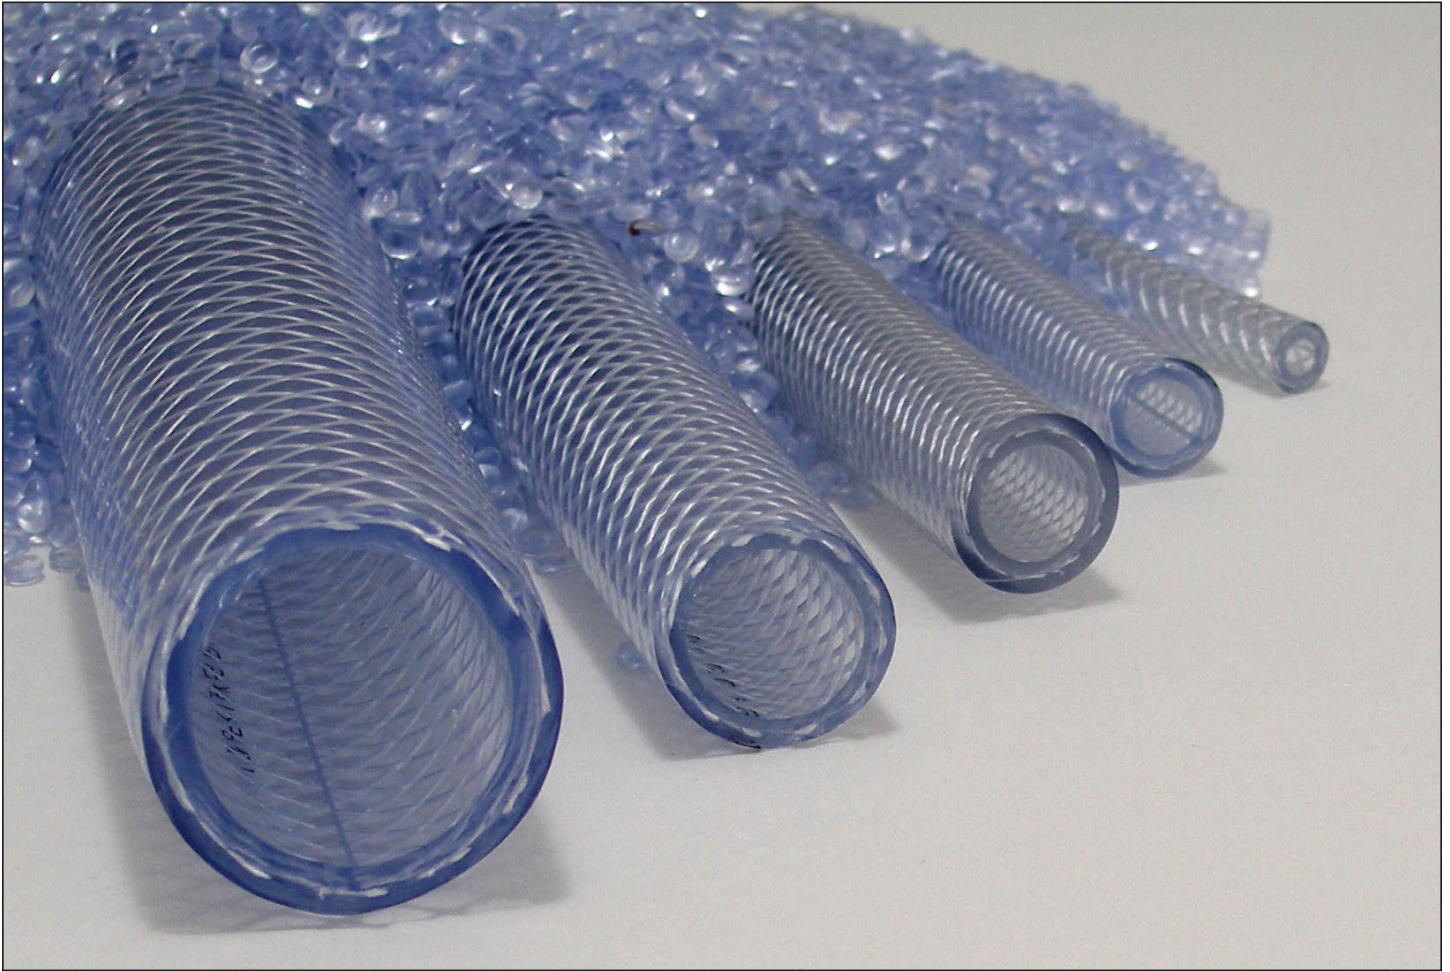

NSF-51 Certified Clear PVC Hose, 80A

TUBE

Clear 80A (+/-3)
NSF-51 Certified PVC

TEMP RANGE

+25 F to +150 F
-5 C to +65 C

REINFORCEMENT

Yes

RATINGS

NSF-51 Certified USP Class
VI Rated Compound, FDA
Ingredients, Self Extinguishing

JACKET

80A (+/-3) NSF-51
Certified PVC

CUSTOM OPTIONS

Refer to Custom Capabilities
page



NSF-51 Certified Clear PVC Hose, 80A

ITEM NUMBER	ID	OD	WALL	*MAX WP	COLOR	PACKAGING
1600.0300.3000	3/16	0.375	0.094	250 PSI	Clear	300 ft Coil
1600.0400.3000	1/4	0.438	0.094	250 PSI	Clear	300 ft Coil
1600.0500.3000	5/16	0.525	0.106	250 PSI	Clear	300 ft Coil
1600.0600.1001	3/8	0.594	0.110	225 PSI	Clear	100 ft Box
1600.0600.3000			0.110	225 PSI	Clear	300 ft Coil
1600.0800.1001	1/2	0.75	0.125	200 PSI	Clear	100 ft Box
1600.0800.3000			0.125	200 PSI	Clear	300 ft Coil
1600.0800.6004			0.125	200 PSI	Clear	600 ft Reel
1600.1000.1000	5/8	0.875	0.125	200 PSI	Clear	100 ft Coil
1600.1000.3000			0.125	200 PSI	Clear	300 ft Coil
1600.1000.5004			0.125	200 PSI	Clear	500 ft Reel
1600.1200.1000	3/4	1.03	0.140	150 PSI	Clear	100 ft Coil
1600.1200.3000			0.140	150 PSI	Clear	300 ft Coil
1600.1200.5004			0.140	150 PSI	Clear	500 ft Reel
1600.1600.1000	1	1.3	0.140	125 PSI	Clear	100 ft Coil
1600.1600.2000			0.150	125 PSI	Clear	200 ft Coil
1600.2000.1000	1 1/4	1.625	0.188	100 PSI	Clear	100 ft Coil
1600.2400.1000	1 1/2	1.937	0.219	100 PSI	Clear	100 ft Coil
1600.3200.1000	2	2.49	0.245	75 PSI	Clear	100 ft Coil

* Working pressures shown are based at +68 F/+20 C